



# Cloud Managed Wi-Fi 6 2x2 Outdoor Access Point

Dual-Band 11ax reaches speeds of 1,200 Mbps on 5GHz and 574 Mbps on 2.4GHz band



### Product Highlights

EnGenius Cloud Managed ECW260 Outdoor Wi-Fi 6, 2x2, IP67, MU-MIMO Dual-Band Access Point reaches speeds of 1,200 Mbps on 5GHz and 574 Mbps on 2.4GHz band. This top-of-the-line cloud-managed AP features the latest in rugged weatherproofing and Wi-Fi 6 technology with guaranteed top-notch performance and reliability in the harshest environments.

### Features & Benefits

- Dual concurrent 802.11ax & backward-compatible with 11ac/a/b/g/n client devices
- Supports up-to 1,200 Mbps in 5-GHz band & 574 Mbps in 2.4-GHz band
- IP67-Rated weatherproof & dustproof housing withstands harsh environments
- 2.5 GigE PoE+ compatible port for easy placement where power outlets are scarce
- Four (4) (2x2) detachable 5dbi high-gain, 360° SMA-type antennas

## Technical Specifications

### ECW260

#### Standards

IEEE 802.11b/g/n on 2.4 GHz

IEEE 802.11a/n/ac on 5 GHz

#### Antenna

2 x 2.4 GHz: 6 dBi

2 x 5 GHz: 6 dBi

External Omni-Directional Antenna

#### Physical Interface

1 x 10/100/1000/2500 BASE-T, RJ-45 Ethernet Port

#### LED Indicators

1 x Power

1 x LAN

1 x 2.4 GHz

1 x 5 GHz

#### Power Source

Power-over-Ethernet: 802.3af/at or Proprietary 54V

IEEE 802.11e Compliant Source

Active Ethernet (PoE)

#### Maximum Power Consumption

15.9W

#### Wireless & Radio Specifications

Dual-Radio Concurrent 2.4 GHz & 5 GHz

#### Operation Modes

Manage Mode: AP and Mesh

#### Frequency Radio

2.4 GHz: 2400 MHz ~ 2472 MHz

5 GHz: 5150 MHz ~ 5250 MHz, 5725 MHz ~ 5850 MHz

### Transmit Power

Up to 23 dBm on 2.4 GHz

Up to 25 dBm on 5 GHz

### Tx Beamforming (TxBF)

### Radio Chains/Spatial Stream

2x2:2

### SU-MIMO

Two (2) spatial streams Single User SU-MIMO for up to 574 Mbps wireless data rate with HE40 bandwidth to a 2x2 wireless client device under the 2.4GHz radio. Two (2) spatial stream Single User SU-MIMO for up to 867 Mbps wireless data rate with VHT80 to a 2x2 wireless device under the 5GHz radio.

### MU-MIMO

Two (2) spatial streams MU-MIMO up to 1,200 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 5GHz simultaneously.  
Two (2) spatial streams MU-MIMO up to 574 Mbps wireless data rate for transmitting to two (2) streams MU-MIMO 11ax capable wireless client devices under 2.4GHz simultaneously.

### Supported Data Rates (Mbps):

802.11ax:

2.4 GHz: 9 to 287 (MCS0 to MCS11, NSS = 1 to 2)

5 GHz: 18 to 1200 (MCS0 to MSC11, NSS = 1 to 2)

802.11b: 1, 2, 5.5, 11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

802.11n: 6.5 to 300 Mbps (MCS0 to MCS15)

802.11ac: 6.5 to 867 Mbps (MCS0 to MCS9, NSS = 1 to 2)

802.11b: 1,2,5.5,11

802.11a/g: 6, 9, 12, 18, 36, 48, 54

### Channelization

802.11ax supports high efficiency (HE) –HE 20/40/80 MHz

802.11ac supports very high throughput (VHT) –VHT 20/40/80 MHz

802.11n supports high throughput (HT) –HT 20/40 MHz

802.11n supports very high throughput under the 2.4GHz radio –VHT40 MHz (256-QAM)

802.11n/ac/ax packet aggregation: A-MPDU, A-SPDU

### Supported Modulation

802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM

802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM

### Management

#### Multiple BSSID

8 SSIDs on both 2.4GHz and 5GHz radios.

#### VLAN Tagging

Supports 802.1q SSID-to-VLAN Tagging

Cross-Band VLAN Pass-Through

Management VLAN

### Spanning Tree

Supports 802.1d Spanning Tree Protocol

### QoS (Quality of Service)

Compliant With IEEE 802.11e Standard

WMM

### SNMP

v1, v2c, v3

### MIB

I/II, Private MIB

### Wireless Security

OWE

WPA2 Personal

WPA3 Personal (SAE) - WPA3 Only

WPA3/WPA2 Personal Mixed

WPA2 Enterprise

WPA3 Enterprise Suite B

Hide SSID in Beacons

MAC Address Filtering, Up to 32 MACs per SSID

Wireless STA (Client) Connected List

SSH Tunnel

Client Isolation

### Environment & Physical Temperature Range

Operating: -4°~140°F/-20°C~60°C

Storage: -40F°~176°F/-40°C~80°C

### Humidity (non-condensing)

Operating: 90% or less

Storage: 90% or less

Outdoor Rating: IP67-Rated Enclosure

### Dimensions & Weight

Weight: 1.54 lbs. (0.7 kg)

Length: 7.48" (190 mm)

Width: 4.07" (124 mm)

Height" 2.07" (52.5 mm)

### Package Contents

1 – ECW260 Cloud Managed Outdoor Access Point

1 - Pole-Mounting Brackets

1 - Wall-Mount Screw Set

2 - 2.4GHz 5dBi SMA Antennas

2 - 5GHz 5dBi SMA Antennas

1 - Quick Installation Guide

### Certifications

FCC,CE, IC


### Warranty

2 Year

## Product Images


## Plug & Play with Zero Configuration

# Scan & Go

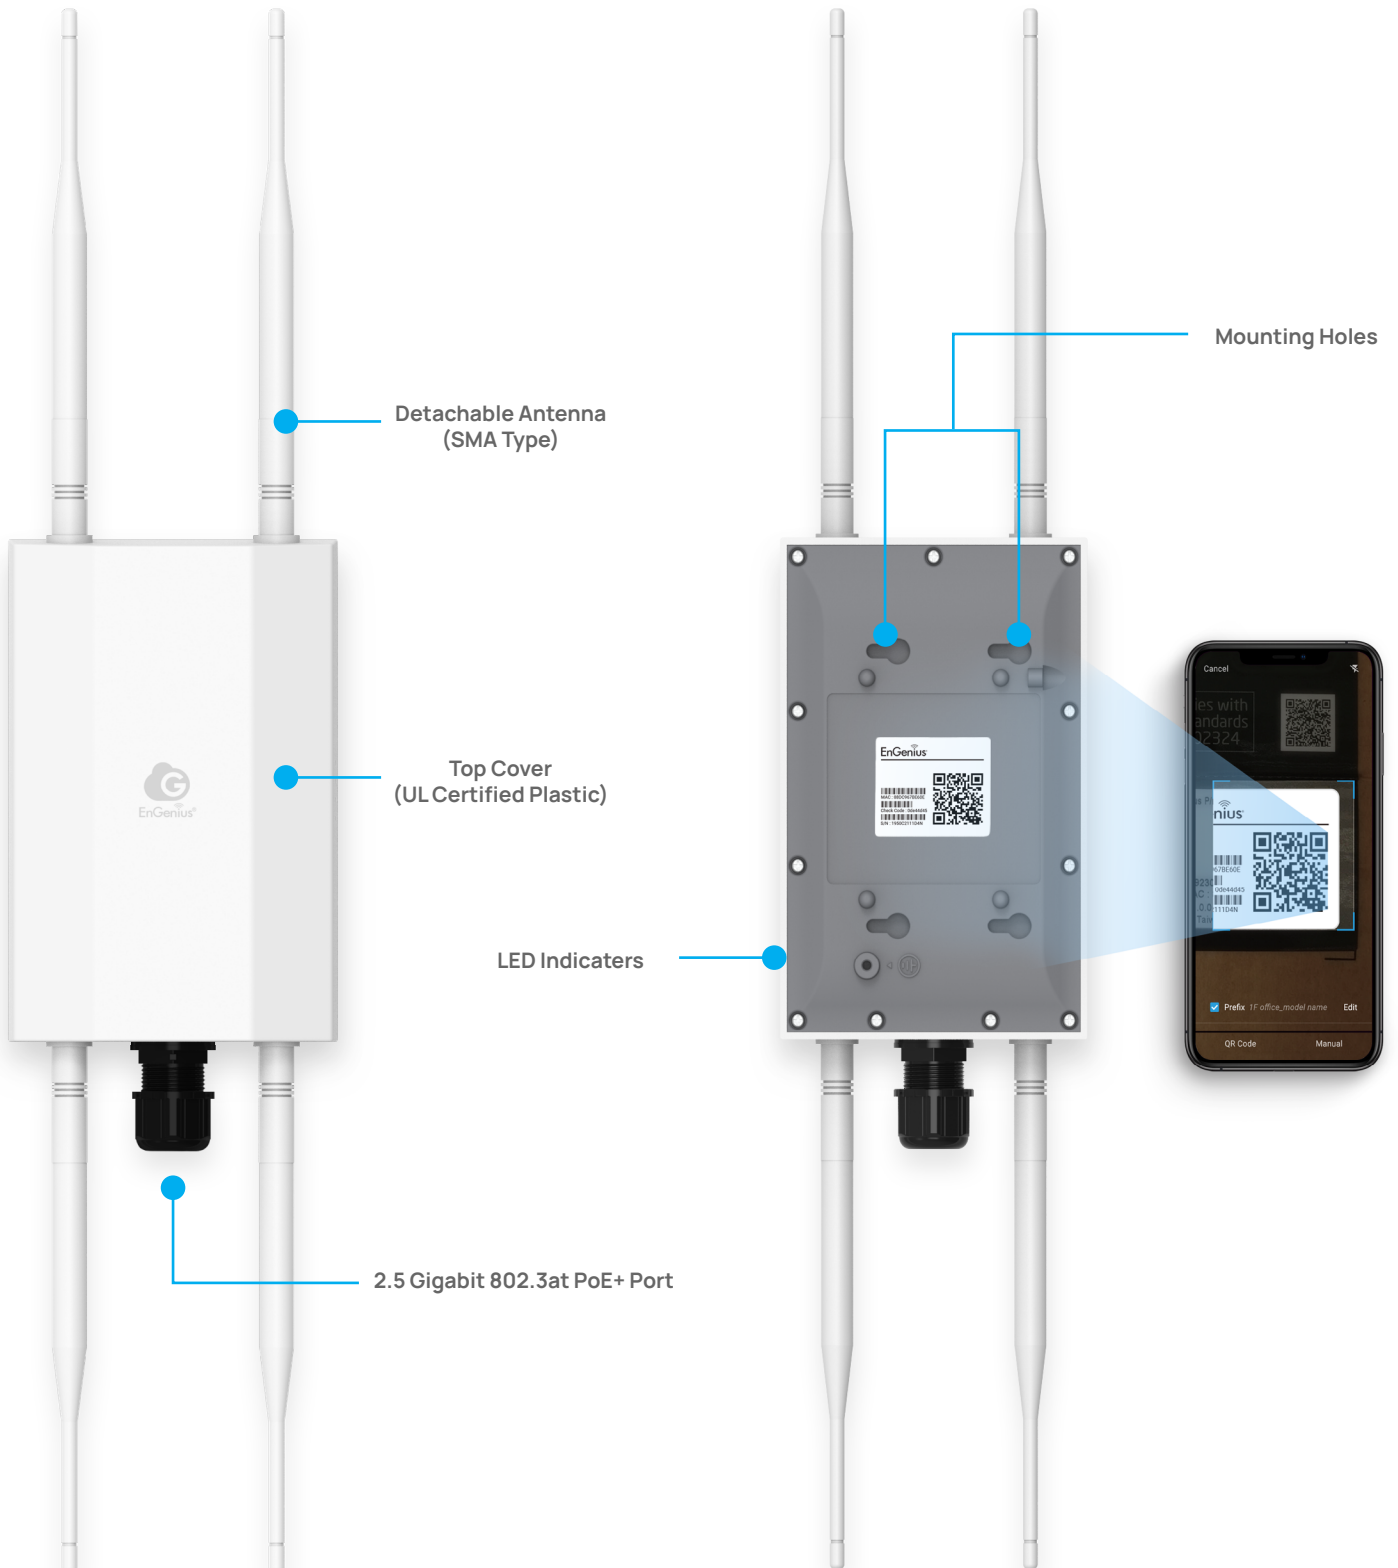


# Radio Patterns


2.4 GHz: E-Plane

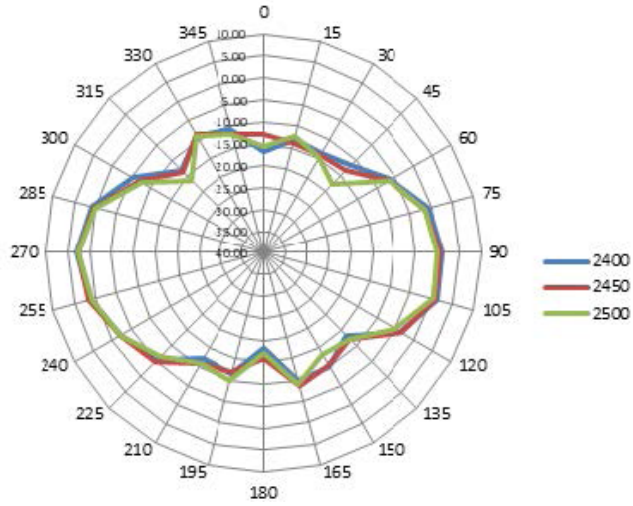

5 GHz: E-Plane

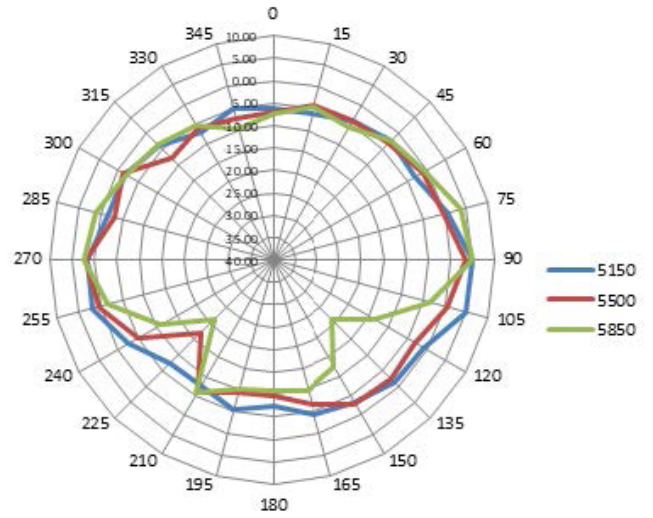

2.4 GHz: H-Plane

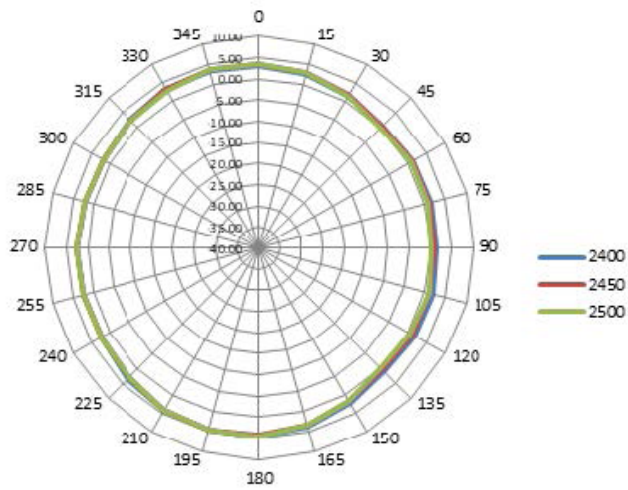

5 GHz: H-Plane

