


Balance 210

Ultimate Small Branch Router.



At a Glance

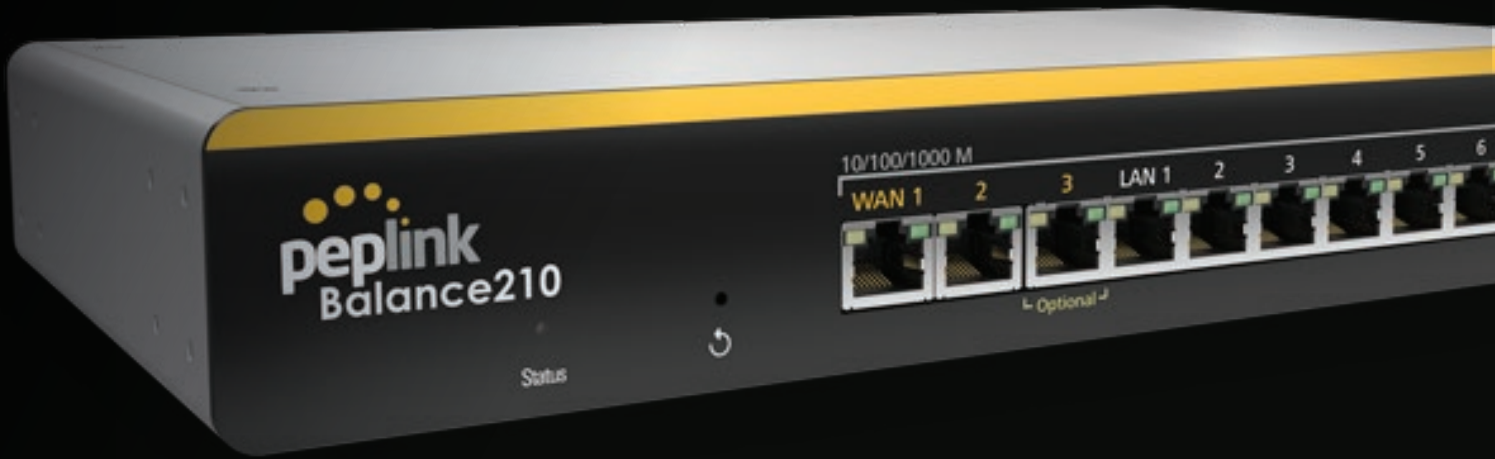

Up to 3x

Ethernet WAN
(Gigabit Ethernet)



7x

Ethernet LAN
(Gigabit Ethernet)



1x

USB WAN Port



350Mbps

Stateful Firewall
Throughput



150Mbps

PepVPN Throughput
(No Encryption)




Up to 5

VPN Peers

Balance 210

Specifications

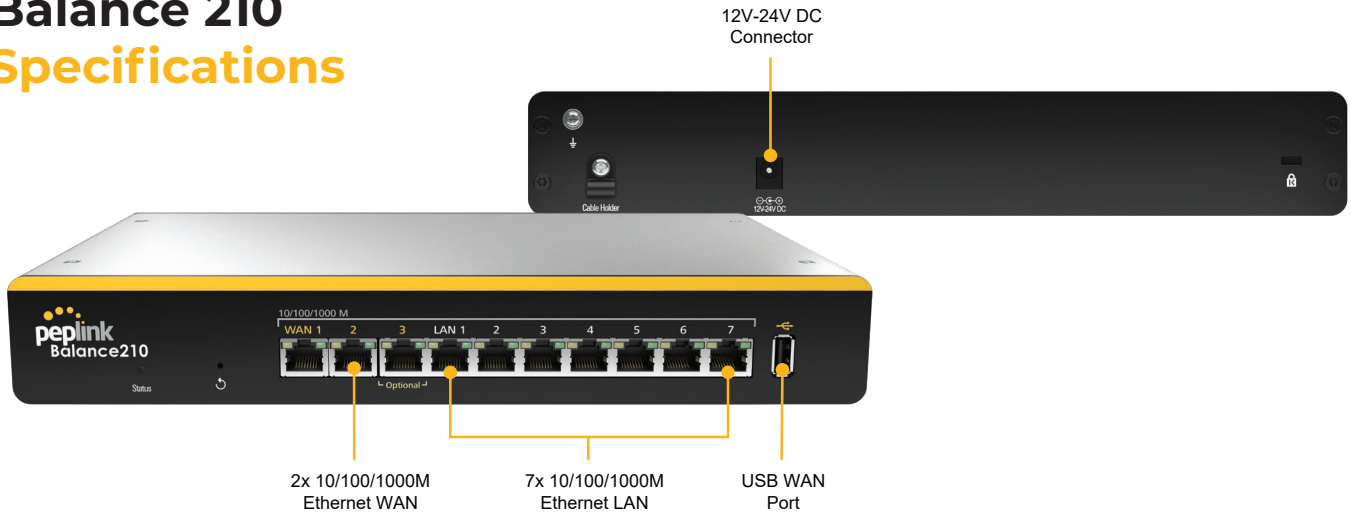

WAN Interface	2/3 (GE)* 1x USB Interface	Content Filtering	Lite
LAN Interface	7 (GE)	Manage Pepwave AP	Yes
Stateful Firewall Throughput	350 Mbps	Remote User Access	Yes
PepVPN Throughput (No Encryption)	150 Mbps	L2TP / PPTP VPN Server	Yes
PepVPN Throughput (256-bit AES)	80 Mbps	Bandwidth Usage Monitor	Yes
Recommended Users	25 - 150	QoS for VoIP and E-commerce	Yes
Number of PepVPN SpeedFusion Peers	2/5 [‡]	User Groups Bandwidth Control	Yes
Maximum Number of AP Supported	30	Web Blocking	Yes
SpeedFusion Hot Failover	Yes	Operating Temperature	-40° – 149° F / -40° – 65° C
SpeedFusion WAN Smoothing	Yes	Power Consumption	15 W
SpeedFusion Bandwidth Bonding	Yes	1U Rack-mount	Yes
Central Management	InControl 2	Dimensions (W x D x H)	11.6 x 10.7 x 1.73 inches / 29.3 x 27.3 x 4.4 cm
High Availability	Yes	Weight	2.2 pounds / 1 kg
Drop-in Mode	Yes	Certifications	FCC, CE, RoHS
		Warranty	1-Year Limited Warranty
		Package Content	1x Balance 210 12V2A Power Supply (ACW-601) 1 Pair of Mounting Brackets (ACW-731) Rubber Foot Pad Set

*Third Ethernet WAN port can be enabled with License (BPL-210-LC-WAN).

‡ 2 SpeedFusion Peers are enabled by default. 5 Peers can be activated with additional license (PVN-LC-05).

Ordering Information

Product Code	Model	Description
BPL-210	Balance 210	2x GE WAN ports and 7x GE LAN ports. SpeedFusion capable.

Feature Add-on

Product Code	Description
BPL-210-LC-WAN	Activate third Ethernet WAN
BPL-305-SPF	Enable up to 5 SpeedFusion peers.