# Peplink Balance 310X



Enterprise SD-WAN router for Medium Branches

## **Affordable High Performance**

The Balance 310X uses all GE ports and offers a routing throughput of 2.5 Gbps. It provides all the connectivity needed to support small and medium sized business operations.



# **Unbreakable Connectivity with LTE**

The Balance 310X provides built-in LTE for seamless failover. Patented SpeedFusion technology combines multiple connections for jitter-free calls and high-speed transfers




### Rugged Industrial-Grade Design



The Balance 310X has a fanless design and a wide temperature range. Drop it into demanding environments and run it for years without worry.

### Scalable Management

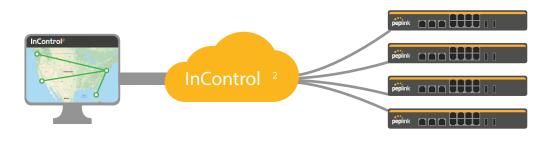

The Balance 310X comes with the InControl central management system. Easily centralize firewall rules, outbound policy, VLAN, device configurations and more.

## **Balance 310X**



### Specifications

WAN Interface	1x Embedded LTEA-PRO Modem with	Power Consumption	30W (max.)	
	Redundant SIM Slots 2x 10/100/1000M Ethernet 2x USB 2.0 Interface	Dimensions	1.7 x 11.5 x 7.0 inches 43 x 292 x 177 mm	
LAN Interface	9x 10/100/1000M Ethernet	Weight	7.28 pounds 3.3 kg	
Router Throughput	2.5 Gbps	Operating Temperature	-40° – 149 °F -40° – 65 °C	
PepVPN Throughput (No Encryption)	600 Mbps	Humidity	-40 - 65 C 15% - 95% (non-condensing)	
PepVPN Throughput	500 Mbps	Certifications	FCC, CE, RoHS	
(256-bit AES)  Cellular Data Rate <sup>®</sup> (Downlink/Uplink)	CAT-12: 600 Mbps/150 Mbps CAT-20: 2 Gbps/211 Mbps	Package Content	Balance 310X, 1x PSU 24V 2.5A (ACW-647), 2x or 4x LTE/5G Antennas (ACW-234) 1x GPS Antenna (ACW-232),	
Recommended Users	50-500		Ear L-Mounts kit (ACW-513), Rubber Foot Pad Set, Grounding Cable	
Cellular and GPS Antenna Connectors	2x SMA Antenna Connectors (for CAT-12) 4x SMA Antenna Connectors (for CAT-20) 1x SMA GPS Antenna Connector	Warranty	1-year Limited Warranty	
Power Input	Power Din DC: 12V – 30V			

#### Ordering information

Product Code	Carrier/ Category	Embedded Modems	4G Bands	3G Bands
BPL-310X-LTEA-R-T	America / CAT-12	1	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B18, B19, B20, B26, B29, B30, B32, B41, B42, B43, B46, B48, B66	B1, B2, B4, B5, B6, B8, B9, B19
BPL-310X-LTEA-D-T	APAC & EMEA / CAT-12	1	B1, B2, B3, B4, B5, B7, B8, B9, B12, B13, B14, B17, B18, B19, B20, B21, B25, B26, B28, B29, B30, B32, B38, B39, B40, B41, B66	B1, B2, B3, B4, B5, B8, B9, B19
BPL-310X-GLTE-S-T	Global / FirstNet / CAT-20	1	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B46 (LAA), B48, B66, B71	B1, BHSPA+/WCDMA: B1, B2, B3, B4, B5, B6, B8, B9, B19





## **Expansion Module for B310X**



#### **Specifications**

Interface

1x Embedded Cellular Modems with Redundant SIM Slots

1x SMA Antenna Connectors, 1x SMA GPS Antenna Connector

Cellular Data Rate® (Downlink/Uplink)

1x Embedded Cellular Modems with Redundant SIM Slots

1x SMA GPS Antenna Connectors, 1x SMA GPS Antenna Connector

CAT-20: 2 Gbps/211 Mbps

#### Ordering information

Product Code	Description	Embedded Modems	Carrier/Categories	4G Bands	3G Bands
EXM-310X-GLTE-S	Expansion Module for B310X with 1x LTE-A Pro (CAT-20) modem	1	Global / CAT-20	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30. B32, B34, B38, B39, B40, B41, B42, B46 (LAA), B48, B66, B71	HSPA+/WCDMA: B1, B2, B3, B3, B4, B5, B6, B8, B9, B19



